

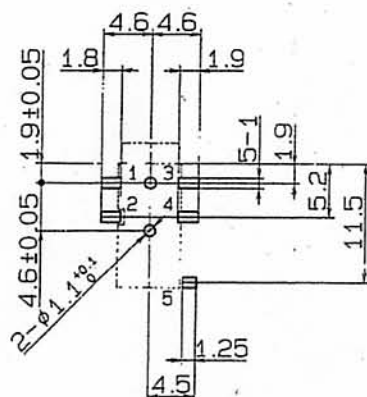

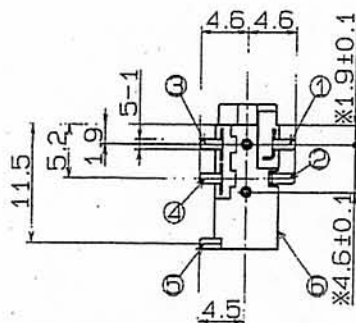


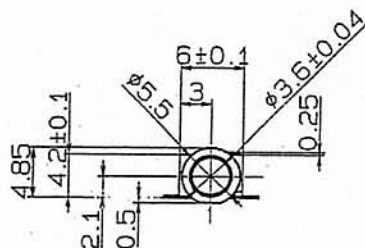

プリント基板半田付け部参考図

FOOT PRINT



※印は位置決めピンの寸法を示す。

記号	改	歴	年月日	担当	承認
△					
△					



NOTE: CONTACT RESISTANCE - 30 miliohm Max.

INSULATION RESISTANCE - 100 Megaohm min.
@500 VDC

DIELECTRIC STRENGTH - 500 VAC for one minute.

LIFE CYCLE - 5,000 cycles min.

INSERTION & EXTRACTION FORCE - 4 to 20N



回路図
CIRCUIT

6	HOUSING	1	PA46	BLACK	UL94HB
5	TERMINAL T	1	C1720R	Ag-P	t0.25
4	TERMINAL R	1	TiCuR	Ag-P	t0.2
3	TERMINAL E	1	TiCuR	Ag-P	t0.2
2	TERMINAL B	1	TiCuR	Ag-P	t0.2
1	TERMINAL A	1	TiCuR	Ag-P	t0.2
No	PART NAME	Q'TY	MATERIAL	FINISH	

備考	部品番号	弊社品番
φ3.5 4極JACK		03-925A0-70BKA
承認	検図	設計
中川		
作成日	2003.11.26	T.N
図番	K925A0AA	1