
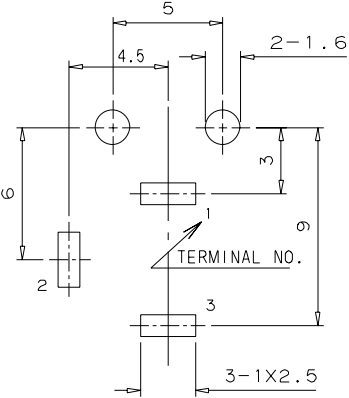


REVISION



LTR	DESCRIPTION	DATE	APPROVED

仕様
SPECIFICATION


1. 定格: DC18V 2A
RATING EIAJ RC5320A 電圧区分5(JSBJ5)
2. 接触抵抗: 30mΩ以下。
CONTACT RESISTANCE:
30mΩ MAX.
3. 絶縁抵抗: DC500V/100MΩ以上。
INSULATION RESISTANCE:
DC500V/100MΩMIN.
4. 耐電圧: AC500V 1分間。
WITHSTAND VOLTAGE:
AC500V 1MINUTE.

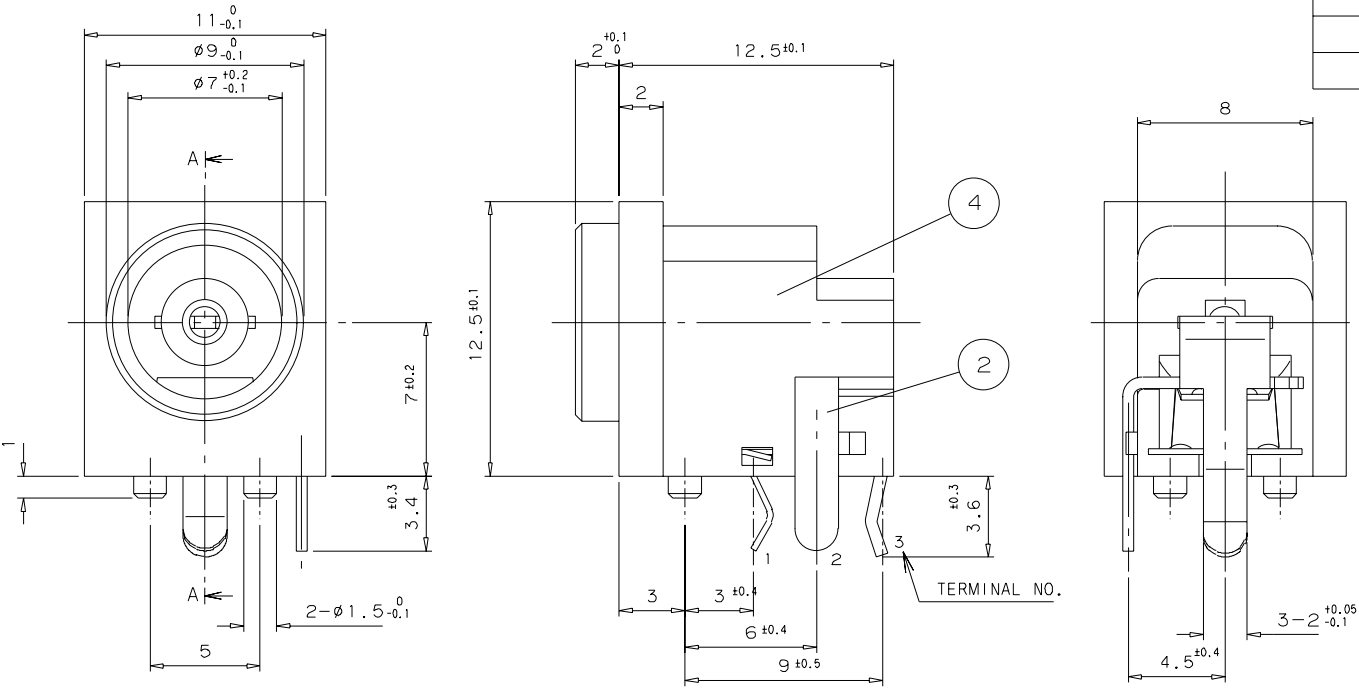

PC BOARD HOLE LAYOUT
(VIEW FROM DIRECTION OF INSERTION TO PCB)

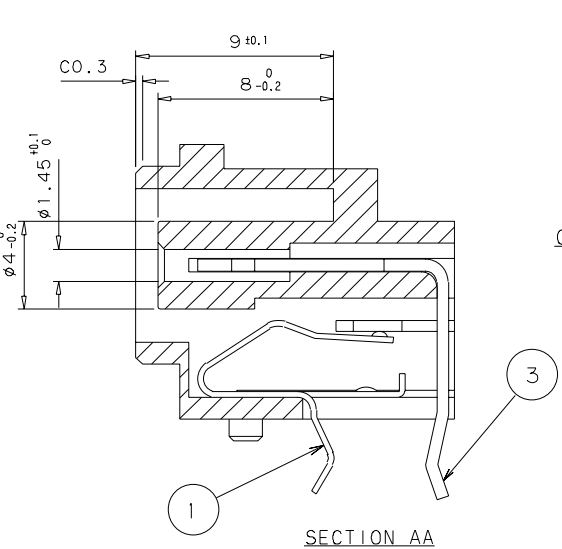

4	BODY	1	PC RESIN	
3	EARTH TERMINAL	1	BRASS 0.55t	Ag-PLATED
2	FIXED TERMINAL	1	BRASS 0.5t	Ag-PLATED
1	TIP SPRING	1	TSB-SH 0.25t	Ag-PLATED
LET	PART NAME	QTY	MATERIAL	REMARK

TOLERANCES		PART NAME		DWG NO.	
X <= 5 = ± 0.10		DC POWER JACK		M05-532A0	
X > 5 = ± 0.30		MATL		SCALE	
ANGULAR = ± ---		AS SHOWN IN TABLE		3/1 mm	
DO NOT SCALE DWG.		DATE		DRN	K. F. I M
FINISHED		13-5-97			
— — — — —		MARUSHIN ELECTRIC MFG. CO., LTD.			