



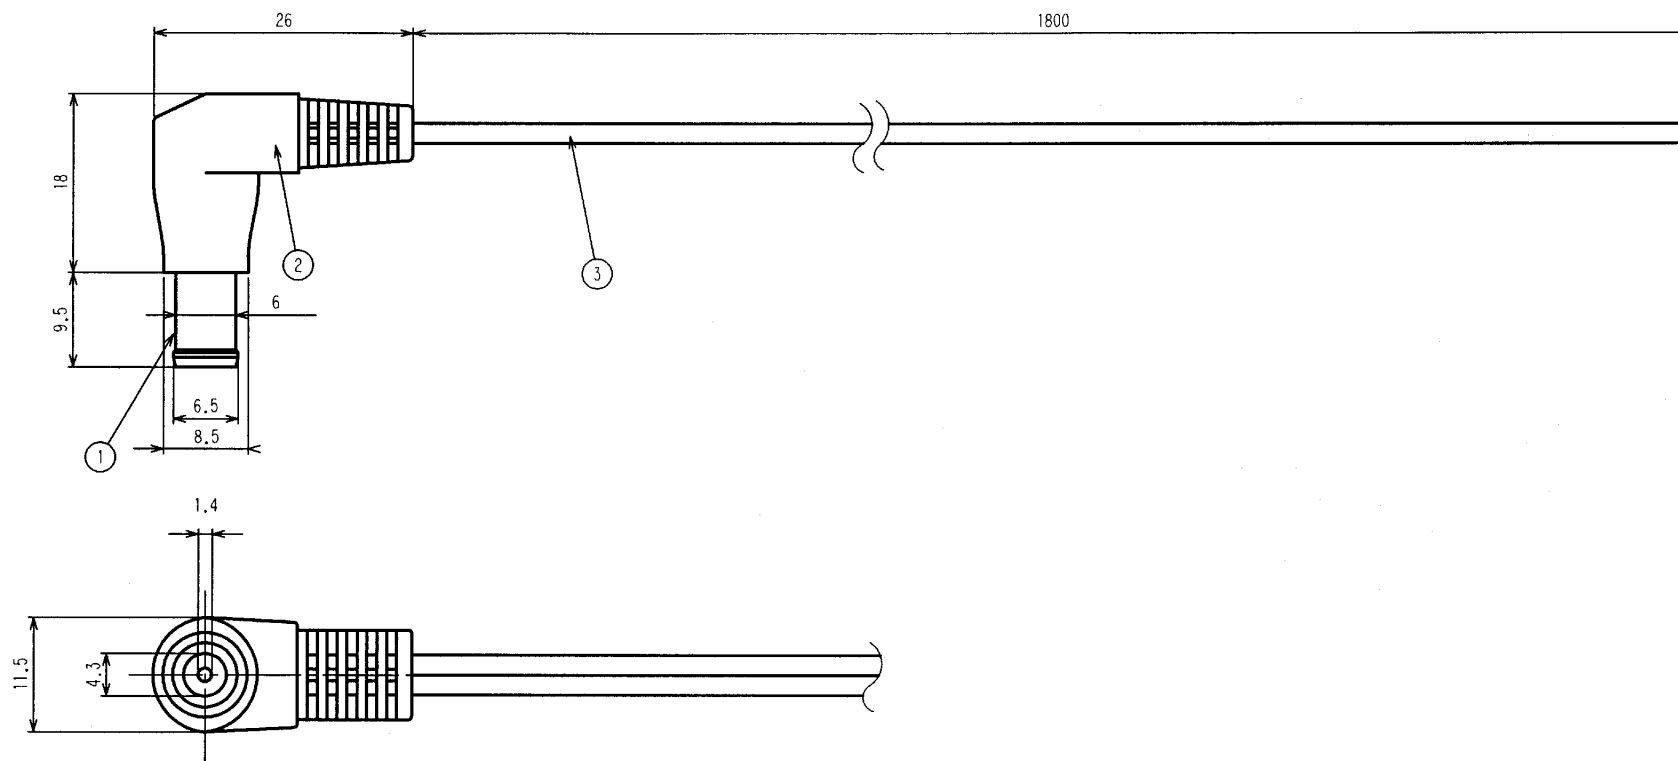

WIRING DIAGRAM

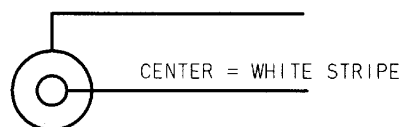

NOTE:

RATING - 18 VDC 2A

CONTACT RESISTANCE - 30 miliohm Max.

INSULATION RESISTANCE - 100Megaohm min. 500 VDC

DIELECTRIC STRENGTH - 500 VAC for one minute.

3	CABLE		0.5sq/2.5X5 PARALLEL PVC
2	JACKET	PVC	BLACK
1	PLUG		EIAJ RC5320A JSBP 5 (ø6.5X4.3)
LET	PART NAME	MATERIAL	NOTE

TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
±0.5		00/4/16		N. I		
MODEL 型式			QTY	PART NAME 品名	L型DCフ*ラク*付ケー*フル MC5325L	
MATERIAL 材質				DRAW. NO 図番	C5325L	
FINISH 処理			EST MARUSHIN ELECTRIC MFG.CO.,LTD			