
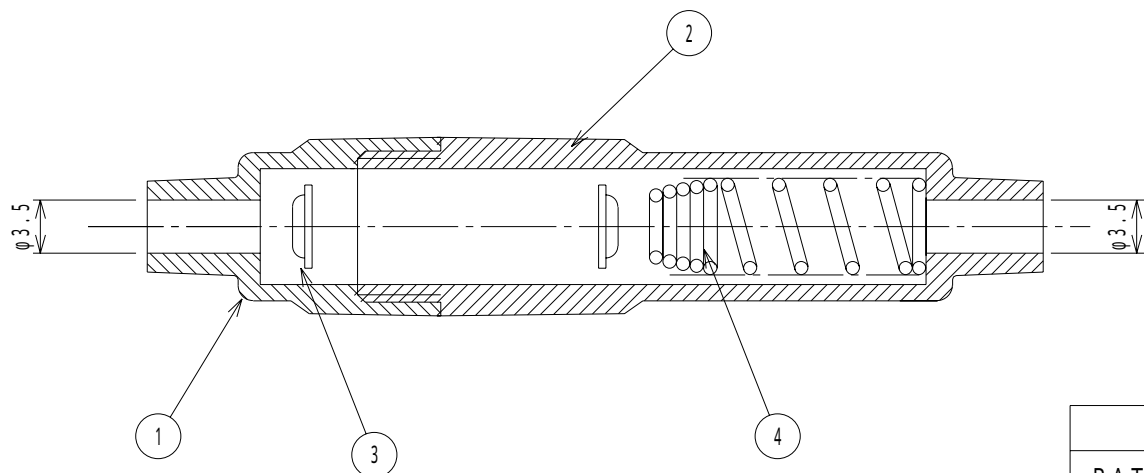


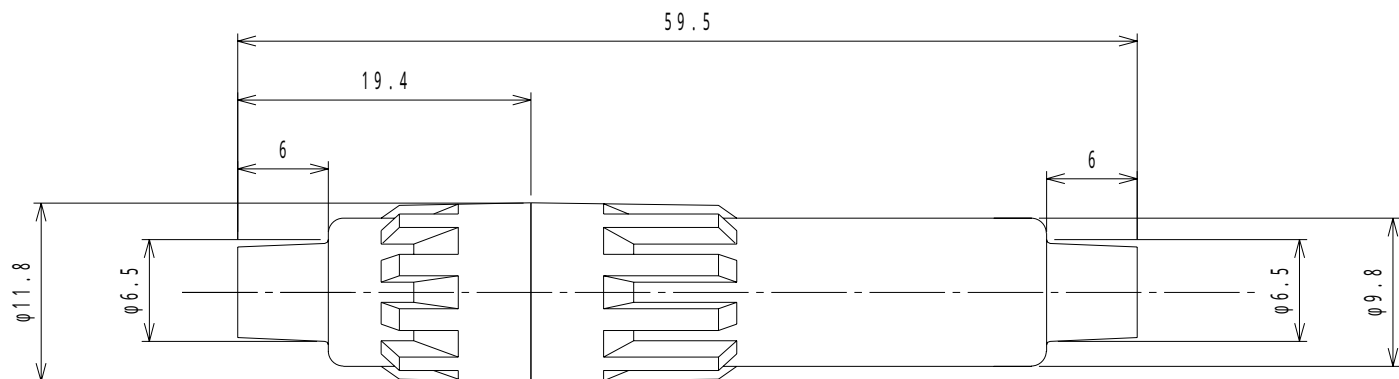

SPECIFICATION 仕様

RATING	定格	10A 250V AC
CONTACT RESISTANCE	接触抵抗	30mΩ MAX.DC1A
INSULATION RESISTANCE	絶縁抵抗	100MΩ MIN.DC500V
BREAKDOWN VOLTAGE	耐電圧	1500V AC FOR 1MINUTE.
FUSE TYPE	適合ヒューズ	φ6.35 X 31.8mm φ6.4X30mm

TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
±0.3	2/1	97/7/31	K.I	N.I	M.K	M.K
NAME	INLINE FUSE HOLDER		P/No.	MF506M		
DWG.NO.	M010009-A			CAD No.	F506M	

4	SPRING スプリング	SWPA φ0.7	1	Ni	
3	CONTACT コンタクト	BRASS	2	Ni	
2	BODY ボディー	POLYAMIDE RESIN	1		UL94V-2
1	CAP キャップ	POLYAMIDE RESIN	1		UL94V-2
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE