

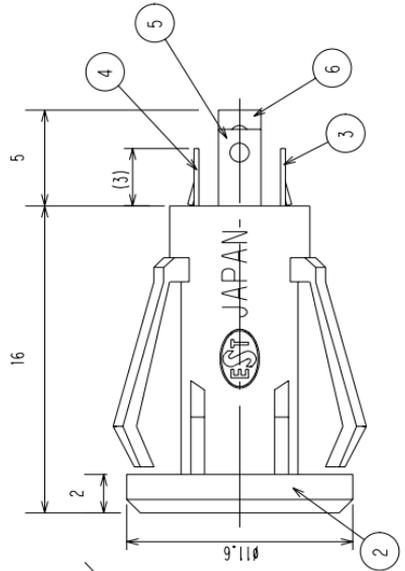


φ3.6±0.04



回路図



CIRCUIT




仕様

SPECIFICATION

耐電圧 : AC500V 1分間  
 DIELECTRIC STRENGTH:500V AC FOR ONE MINUTE.  
 接触抵抗 : 50m 以下  
 CONTACT RESISTANCE:50m MAX  
 絶縁抵抗 : DC100Vにて100M 以上  
 INSULATION RESISTANCE:100M MIN. AT 500V DC.

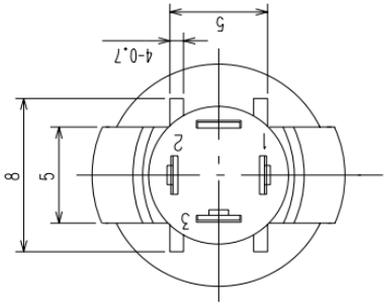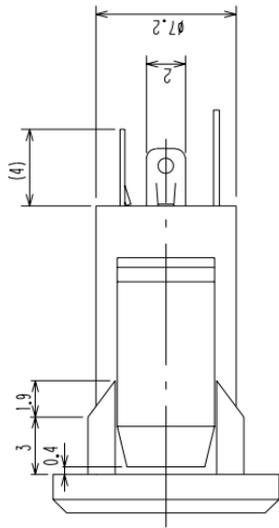

取付穴参考寸法  
 Mounting hole dimension



取付板板厚

Thickness of mounting board

t=1.0-1.8

TOLERANCE	SCALE	DATE	DESIGN	DRAWN	INSPE	APPRO	
±0.3	4/1	03/5/16	K.S	K.S	N.1	N.1	
DRAWING NAME 図名		PART NAME 品名					MJ-064SP φ3.5-4極リレーソケット
QTY		DRAWING NO 図番					MJ064SP
MATERIAL		FINISH					NOTE
6	スリーブ端子 CONTACT D	BSR	t=0.3	1	Ni		
5	リング端子 CONTACT C	FAB-EH	t=0.25	1	Ni		
4	リング端子 CONTACT B	FAB-EH	t=0.25	1	Au		
3	チップ端子 CONTACT A	FAB-EH	t=0.25	1	Ni		
2	本体	PA 66		1			
1	メタル	B5BM		1	Ni		



MANUSHIN ELECTRIC MFG. CO., LTD.