
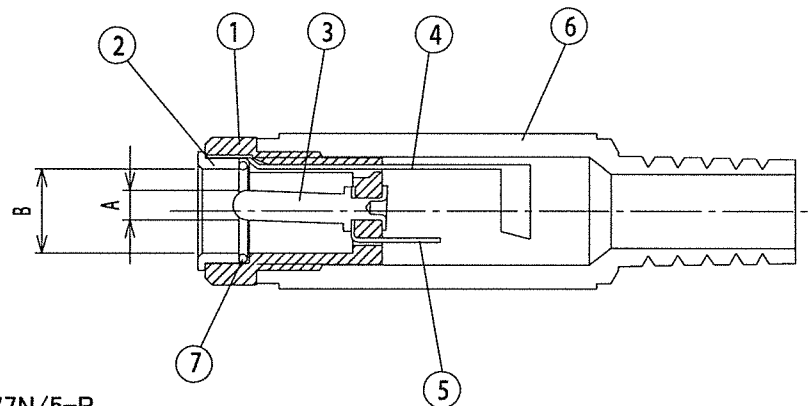

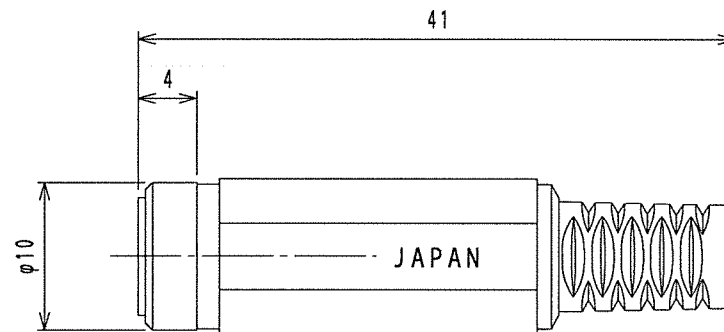




	A部	B部
MJ077N/5	φ2	φ5.7
MJ078N/5	φ2.35	φ5.7

MJ077N/5-R

MJ078N/5-R

仕様
SPECIFICATION

1. 定格: MJ077N/5=DC12V 0.5A
RATING MJ078N/5=DC12V 1A
2. 絶縁抵抗: DC500V/100MΩ以上。
INSULATION RESISTANCE: 100MΩMIN/500V DC.
3. 耐電圧: AC500V 1分間。
BREAKDOWN VOLTAGE: 500V AC FOR 1MINUTE.

7	接触パネ CONTACT	PBW	1	Ni	TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
6	キャップ CAP	PE	1		±0.3	2/1	12/8/1	M, K	N. I		
5	ラグ B TERMINAL B	BSR	1	Ni	MODEL		QTY	PART NAME	DCインラインジ ャツク DC IN-LINE JACKS NO. MJ-077N/5(-R)MJ-078N/5(-R)		
4	ラグ A TERMINAL A	BSR	1	Ni	型式			品名			
3	ピン PIN	BSBM	1	Ni	MATERIAL				DRAW. NO		
2	リング METAL	BSBM	1	Ni	材質				図番		
1	ボディ BODY	PA	1		FINISH						
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE				EST MARUSHIN ELECTRIC MFG. CO., LTD.		