



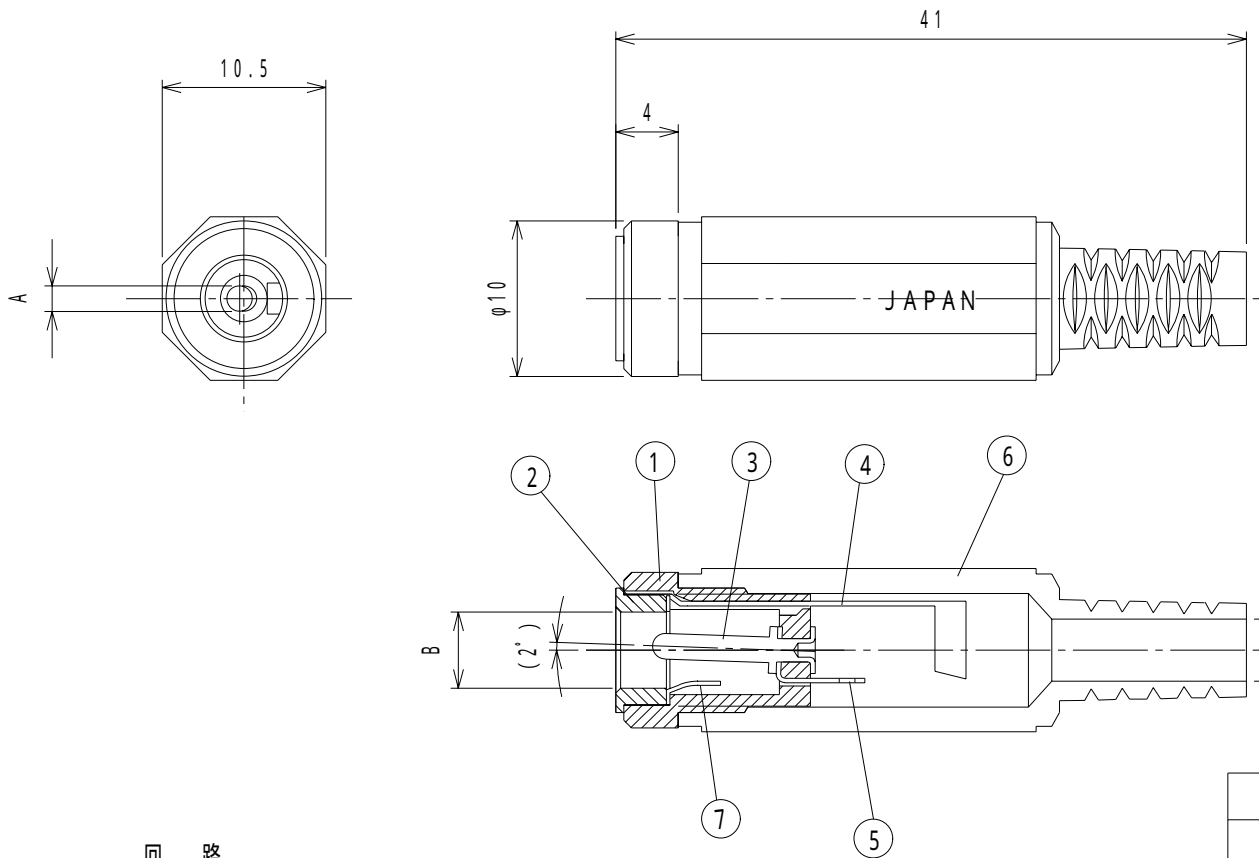

仕様
SPECIFICATION

1. 定格: MJ-095N-R=DC3.15V 2A (電圧区分1 JSAJ1)
RATING MJ-096N-R=DC6.3V 2A (電圧区分2 JSAJ2)
MJ-097N-R=DC10.5V 2A (電圧区分3 JSAJ3)
MJ-099N-R=DC12V 0.5A
MJ-099N-R/3.8=DC12V 0.5A
2. 絶縁抵抗: DC500V/100MΩ 以上。
INSULATION RESISTANCE:
DC500V/100MΩ MIN.
3. 耐電圧: AC500V 1分間。
WITHSTAND VOLTAGE:
AC500V 1MINUTE.
4. 接触抵抗: 30mΩ以下
CONTACT RESISTANCE:
30mΩMAX

回路
CIRCUIT



品番 MODEL No.	A部	B部	適合プラグ MATE PLUG
MJ-095N-R	φ0.65	φ2.5	φ2.35 X φ0.7
MJ-096N-R	φ1.65	φ4.4	φ4.0 X φ1.7
MJ-097N-R	φ1.65	φ5	φ4.75 X φ1.7
MJ-099N-R	φ1.3	φ3.6	φ3.4 X φ1.35
MJ-099N-R/3.8	φ1.3	φ4.0	φ3.8 X φ1.35

						TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
7	接触パネ CONTACT	PBS-EH t=0.25	1	Ni		±0.3	2/1	10/4/6	M.K	N.I		
6	キャップ CAP	PE	1									
5	ラック ^B TERMINAL B	BSR t=0.3	1	Ni		MODEL 型式		QTY	PART NAME 品名	DCバ [*] ワインラインジ [*] ャック DC INLINE JACK No.MJ-095N-R,096N-R,097N-R,099N-R,099N-R/3.8		
4	ラック ^A TERMINAL A	BSR t=0.3	1	Ni								
3	ピン PIN	BSBM	1	Ni		MATERIAL 材質				DRAW.NO 図番	MJ096N	
2	リンク METAL	BSBM	1	Ni								
1	ボデー BODY	PA	1			FINISH 処理						
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE							