



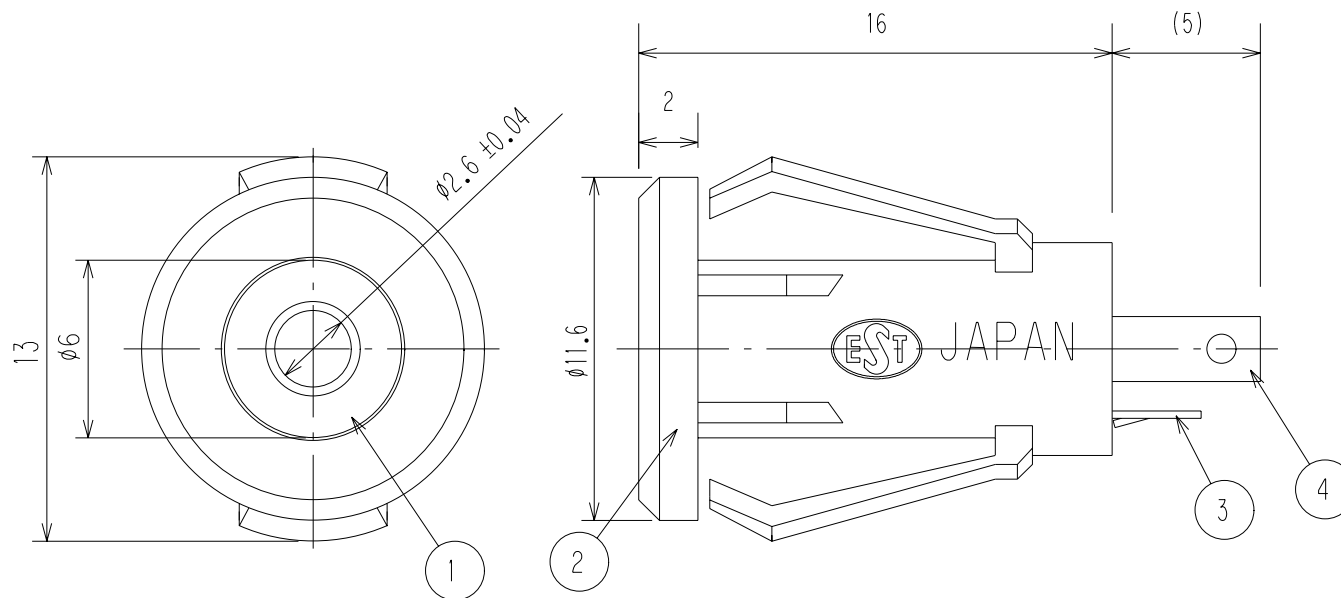

回路図


CIRCUIT




仕様

SPECIFICATION

耐電圧 : AC500V 1分間
DIELECTRIC STRENGTH:500V AC FOR ONE MINUTE.
接触抵抗 : 50mΩ 以下
CONTACT RESISTANCE:50mΩ MAX
絶縁抵抗 : DC100Vにて100MΩ以上
INSULATION RESISTANCE:100MΩ MIN. AT 500V DC.

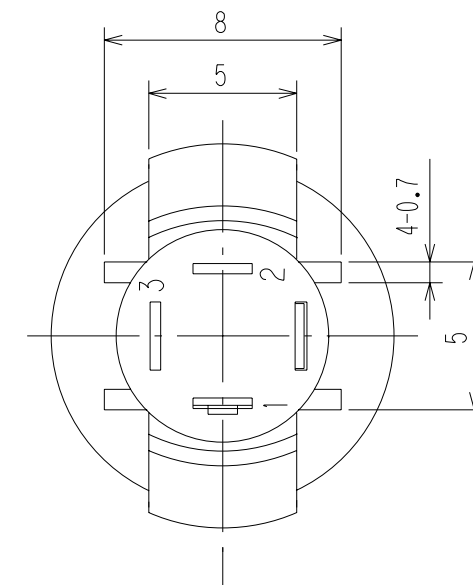

取付穴参考寸法
Mounting hole dimension

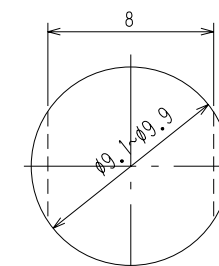

取付板板厚
Thickness of mounting board
t=1.0~1.8

TOLERANCE						SCALE	DATE	DESIGN	DRAWN	INSPE	APPRO
±0.3						4/1	03/5/16	K.S	K.S	N.I	N.I
DRAWING NAME							PART NAME				
図名							品名				
							DRAW.NO				
							図番				
4	スリーブ端子 CONTACT B	BSR t=0.3	1	Ni			EST MARUSHIN ELECTRIC MFG.CO.,LTD.				
3	チップ端子 CONTACT A	PBS t=0.25	1	Ni							
2	本体 BODY	PA 66	1								
1	メタル METAL	BSBM	1	Ni							
NO.	PART NAME	MATERIAL	QTY	FINISH	NOTE						