


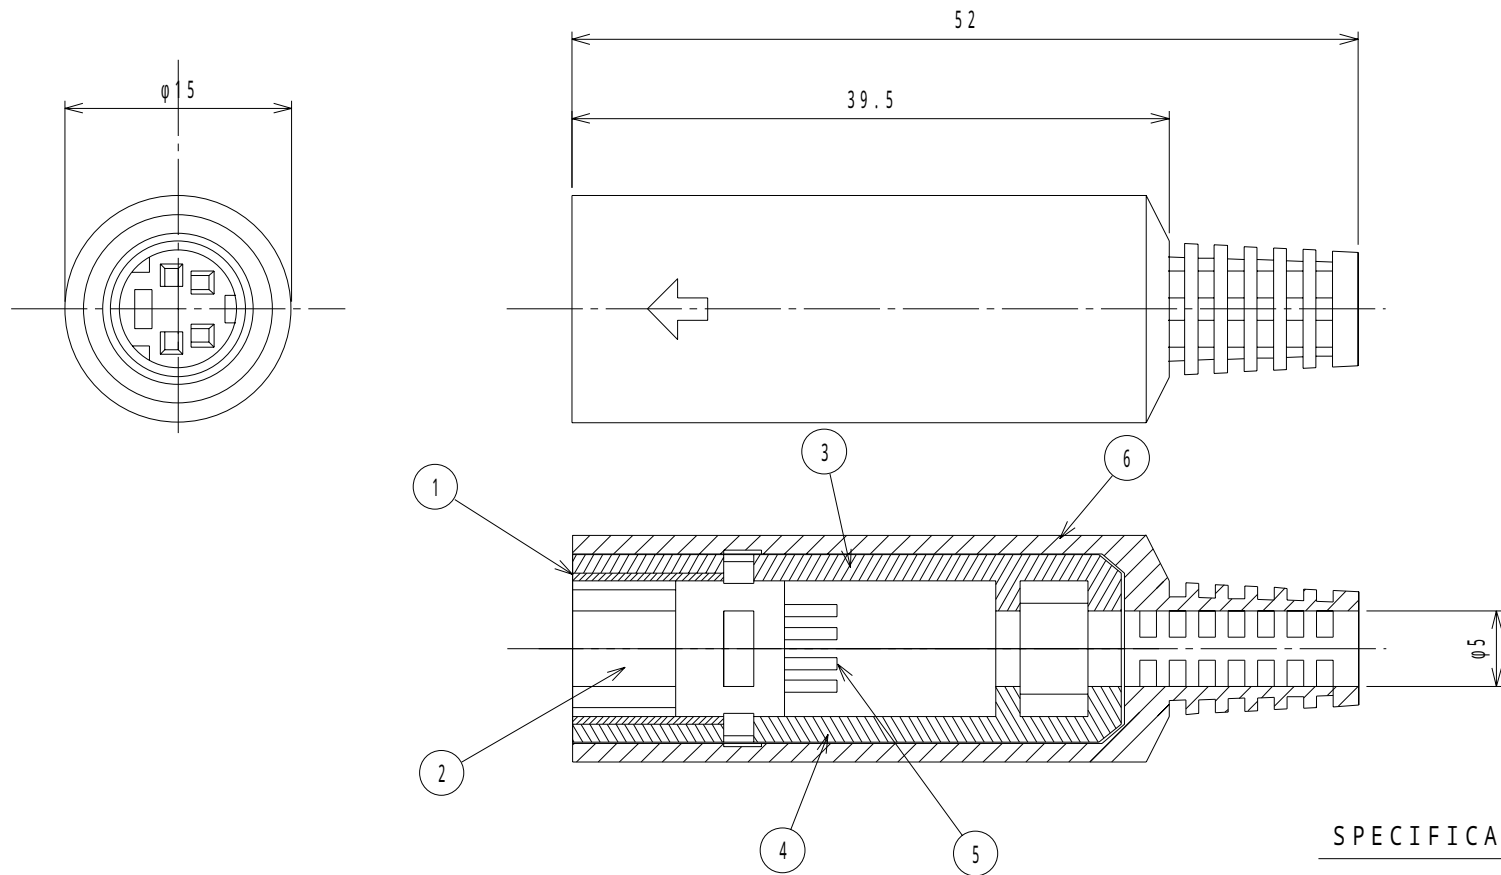

CONTACT CONFIGURATIONS

MJ372/3	MJ372/4	MJ372/5	MJ372/6	MJ372/7	MJ372/8

SPECIFICATION

RATING:100V AC 1A MAX.(12V DC 2A MAX.)

INSULATION RESISTANCE:50M MIN AT 250V DC

DIELECTRIC STRENGTH:250V AC/1 MINUTE.

6	CAP	P P	1		
5	CONTACT	PHOSPHOR BRONZE	3~8		
4	CABLE HOLDER B	ABS	1		
3	CABLE HOLDER A	ABS	1		
2	SHELL	BRASS	1		
1	HOUSING	P C	1		
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE

TOLERANCE	SCALE	DATE		DESING	DRAW	INSPE	APRO
± 0 . 3	2 / 1				N . I		
MODEL 型式	QTY		PART NAME 品名	MINI DIN IN - LINE JACK MJ372 / 3 ~ 8			
MATERIAL 材質					DRAW.NO 図番	MJ372	
FINISH 処理			 MARUSHIN ELECTRIC MFG.CO.,LTD.				