

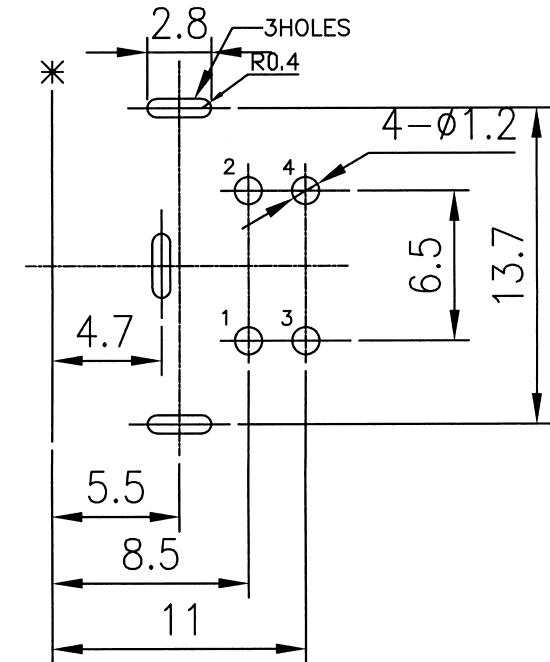
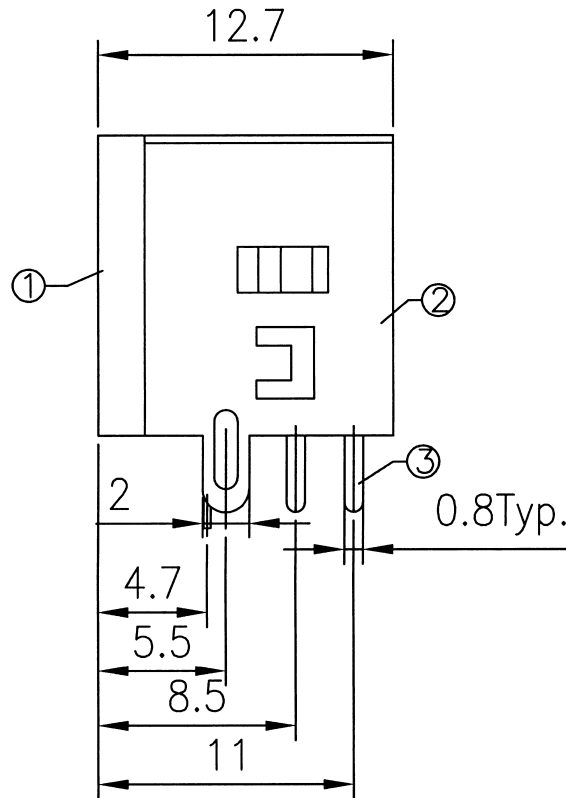


* REVISIONS				
LTR	DESCRIPTION	DATE	REVISED	APPROVED

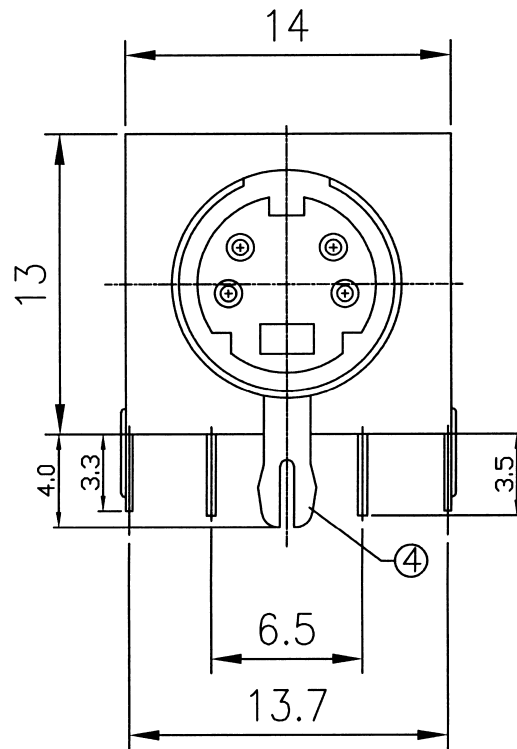

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-Top view)

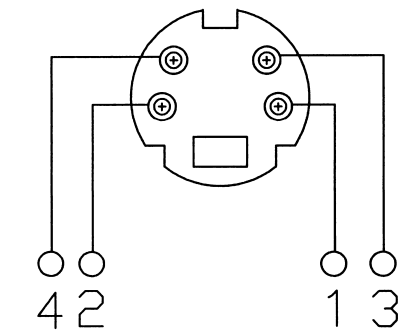

SCHEMATIC DIAGRAM

SPECIFICATION

RATING:100V AC 1A MAX, (12V DC 2A MAX.)
INSULATION RESISTANCE:50M Ω MIN AT 250V DC
DIELECTRIC STRENGTH:250V AC/1 MINUTE.

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

4	CONTACT FOOT	1	C2680	t=0.4	Cu/Sn PLATED
3	CONTACT FOOT	4	C5191	t=0.4	Ag PLATED
2	COAT	1	SPCC	t=0.5	Cu/Sn PLATED
1	HOUSING	1	PBT 4815		UL-94V0(BLACK)
LTR	PART NAME	QTY	MATERIAL		REMARK
DWN		DATE		3RD ANGLE PROJECTION	NAME Mini din jack
CHKD		DATE			CAT. NO.
APVD		DATE			UNIT: mm
MARUSHIN ELECTRIC MFG. CO., LTD.					DWN.NO. MJ373/4B 001