

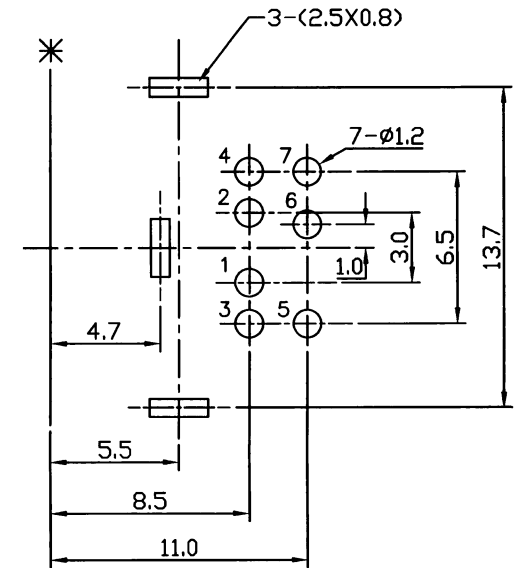
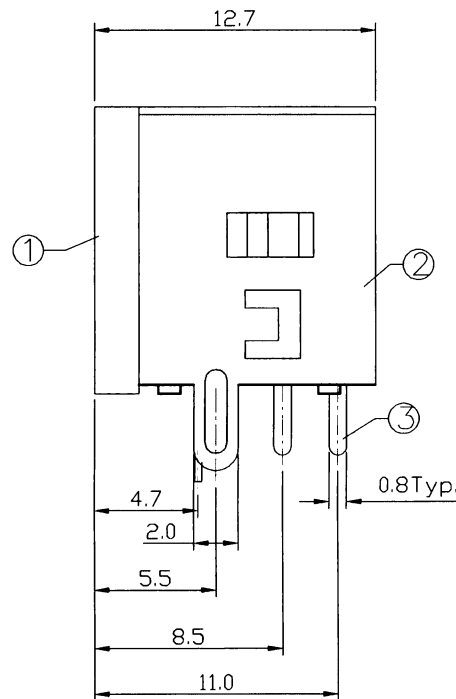


* REVISIONS				
LTR	DESCRIPTION	DATE	REVISED	APPROVED

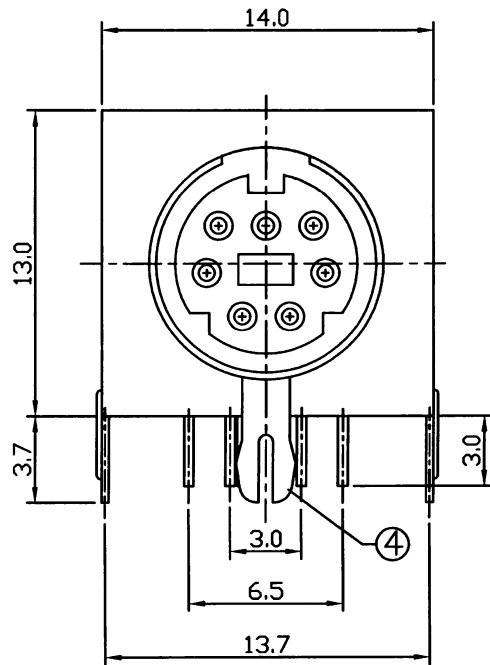

T:1.6 Dimensions of PC board holes

Tolerance : ± 0.05 (Printed-Top view)

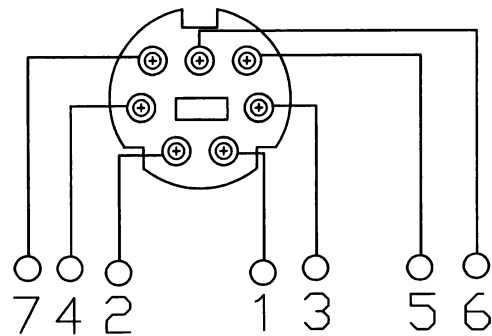

SCHEMATIC DIAGRAM

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

SPECIFICATION

RATING: 100V AC 1A MAX. (12V DC 2A MAX.)
 INSULATION RESISTANCE: 50M Ω MIN AT 250V DC
 DIELECTRIC STRENGTH: 250V AC/1 MINUTE.

4	GROUND CONTACT	1	C2680	Cu/Sn	PLATED
3	CONTACT FOOT	7	C5191	Ag	PLATED
2	COAT	1	C2680	Cu/Sn	PLATED
1	HOUSING	1	PBT 4815	UL-94V0(BLACK)	
LTR	PART NAME	QTY	MATERIAL	REMARK	
DWN		DATE		3RD ANGLE PROJECTION	NAME 7PIN MINI DIN JACK
CHKD		DATE			CAT. NO.
APVD		DATE		UNIT: mm	
MARUSHIN ELECTRIC MFG. CO., LTD.					DWN.NO. MJ373/7B
					001