
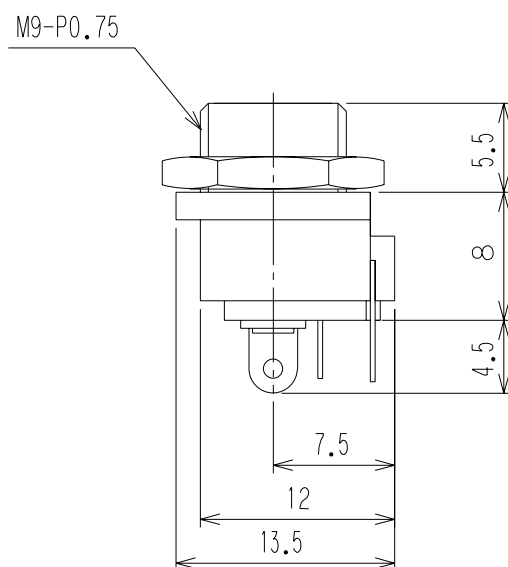
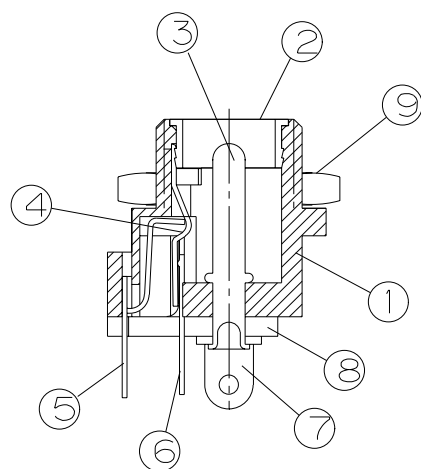
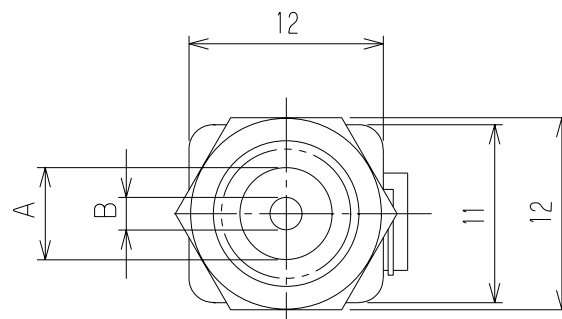


CIRCUIT

仕 様
SPECIFICATION

- 定 格 : MJ-40A=DC12V 1A
RATING MJ-41A=DC12V 1A
MJ-42A=DC6.3V 2A
MJ-43A=DC10.5V 2A
MJ-44A=DC12V 0.5A
MJ-45A=DC12V 0.5A
- 接触抵抗 : 30mΩ以下
CONTACT RESISTANCE:
30mΩ MAX.
- 絶縁抵抗 : DC500V/100MΩ以上.
INSULATION RESISTANCE:
DC500V/100MΩ MIN.
- 耐 電 圧 AC500V 1分間.
WITHSTAND VOLTAGE:
AC500V 1MINUTE.

MODEL	A	B
MJ-40A	φ5.7	φ2
MJ-41A	φ5.7	φ2.35
MJ-42A	φ4.2	φ1.65
MJ-43A	φ5	φ1.65
MJ-44A	φ3.6	φ1.3
MJ-45A	φ4.2	φ1.3

9	ナット	HEX NUT	STEEL	1	Ni							
8	絶縁ヘ ーク	INSULATOR	PBT G30%	1		TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
7	センター端子	TERMINAL 3	BSR t=0.5	1	Ag	±0.3	2/1	23/1/17	K.S	M.K	N.S	N.I
6	固定接触端子	TERMINAL 2	BSR t=0.3	1	Ag							
5	スリーフ 端子	TERMINAL 1	PBS t=0.3	1	Ag	MODEL 型式	QTY	PART NAME 品名	MJ-40A/41A/42A/43A/44A/45A			
4	スリーフ ハ ね	CONTACT	PBS t=0.3	1	Ag							
3	センターピ ン	PIN	BSBM	1	Ni	MATERIAL 材質			DRAW.NO 図番	MJ40X		
2	口 金	SLEEVE	BSBM	1	Ni							
1	本 体	BODY	PA G15%	1		FINISH 処理			EST MARUSHIN ELECTRIC MFG.CO.,LTD.			
LET	PART NAME		MATERIAL	QTY	FINISH							

MARUSHIN ELECTRIC MFG.CO.,LTD.