


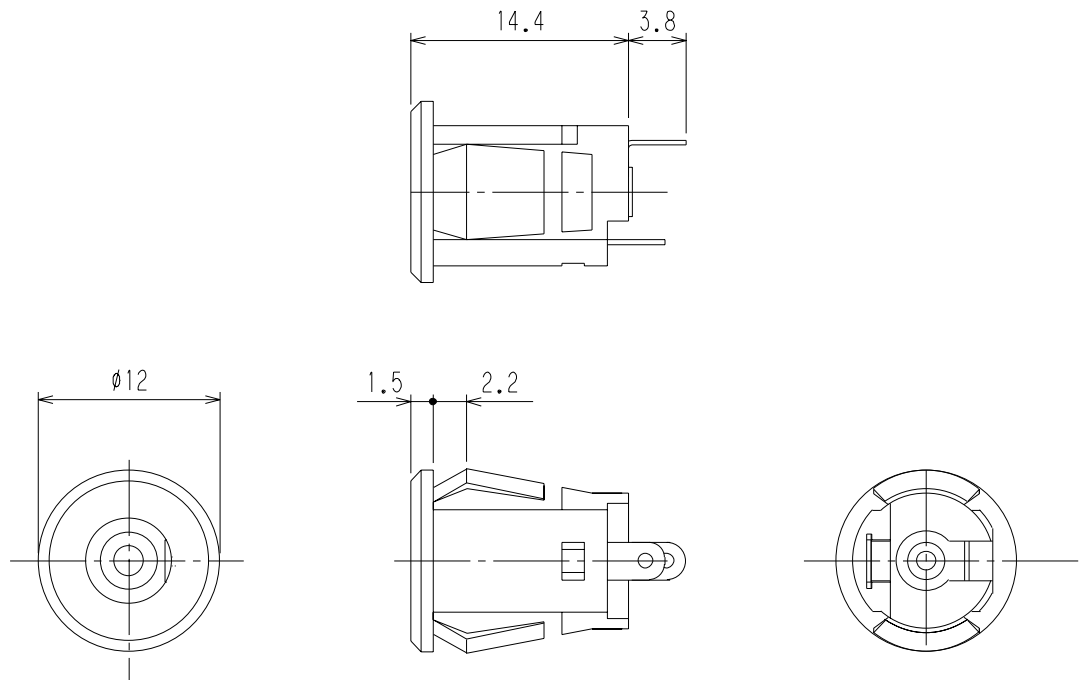

仕様 SPECIFICATION




1. 定格: DC12V 1A
RATING

2. 接触抵抗: 30mΩ以下。
CONTACT RESISTANCE:
30mΩMAX.

3. 絶縁抵抗: DC500V/100MΩ以上。
INSULATION RESISTANCE:
DC500V/100MΩMIN.

4. 耐電圧: AC500V 1分間。
WITHSTAND VOLTAGE:
AC500V 1MINUTE.

取付穴参考寸法 MOUNTING HOLE DIMENSION (t=1.0~1.8mm)

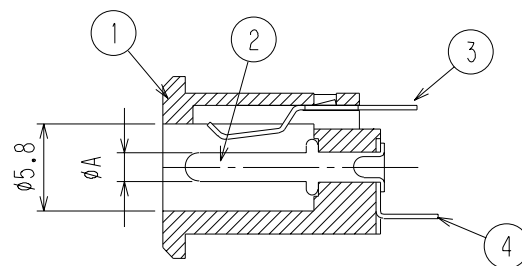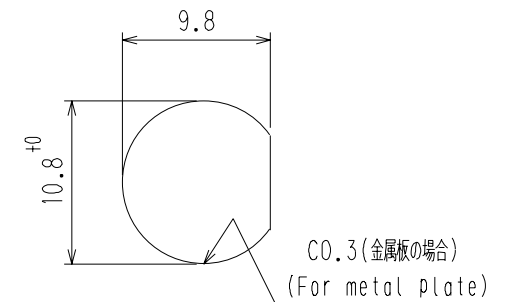

A	
MJ60	φ1.95
MJ61	φ2.35

TOLERANCE	SCALE	DATE		DESING	DRAW	INSPE	APRO
±0.3	2/1	01/1/24		M.K	N.I		
MODEL 型式	QTY		PART NAME 品名	スナップインDCジャック SNAP-IN MOUNTING DC JACK No.MJ60/MJ61			
MATERIAL 材質					DRAW. NO 図番	MJ60	
FINISH 処理			 MARUSHIN ELECTRIC MFG. CO., LTD.				

5	TERMINAL センター端子	BSR t=0.3	1	Ag	
3	CONTACT SPRING 可動端子	FAB-EH t=0.3	1	Ag	
2	PIN センターピン	BSBM	1	Ni	
1	BODY 本体	PA G=15%	1		
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE