

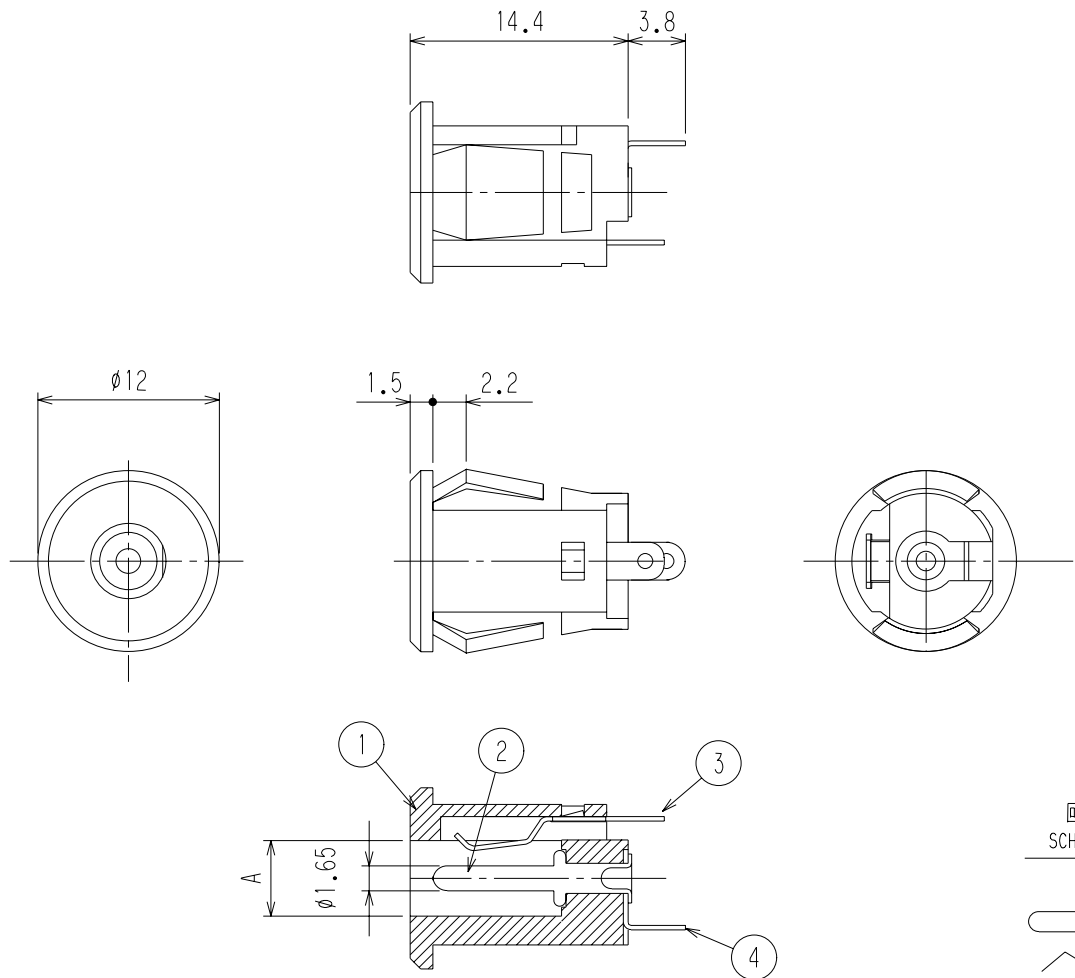


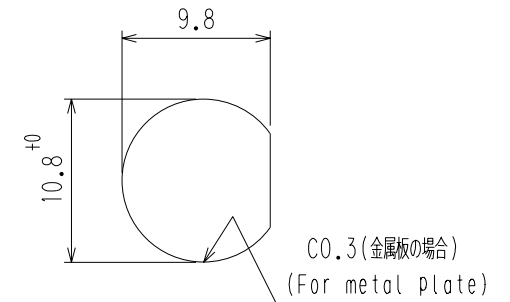

仕様 SPECIFICATION

1. 定格: MJ-62-R=DC6.3V 2A
RATING MJ-63-R=DC10.5V 2A
2. 接触抵抗: 30mΩ以下。
CONTACT RESISTANCE:
30mΩMAX.
3. 絶縁抵抗: DC500V/100MΩ以上。
INSULATION RESISTANCE:
DC500V/100MΩMIN.
4. 耐電圧: AC500V 1分間。
WITHSTAND VOLTAGE:
AC500V 1MINUTE.

取付穴参考寸法 MOUNTING HOLE DIMENSION (t=1.0~1.8mm)



A	
MJ-62-R	φ4.4
MJ-63-R	φ5

TOLERANCE	SCALE	DATE		DESING	DRAW	INSPE	APRO
±0.3	2/1	05/10/22		K.S	N.I		M.K
MODEL 型式	QTY		PART NAME 品名	スナップインDCジャック SNAP-IN MOUNTING DC JACK No.MJ-62-R / MJ-63-R			
MATERIAL 材質					DRAW.NO 図番	MJ62-R	
FINISH 処理			 MARUSHIN ELECTRIC MFG.CO.,LTD.				

4	TERMINAL センター端子	BSR t=0.3	1	Ag	
3	CONTACT SPRING 可動端子	PBS t=0.3	1	Ag	
2	PIN センターピン	BSBM	1	Ni	
1	BODY 本体	PA G=15%	1		
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE