

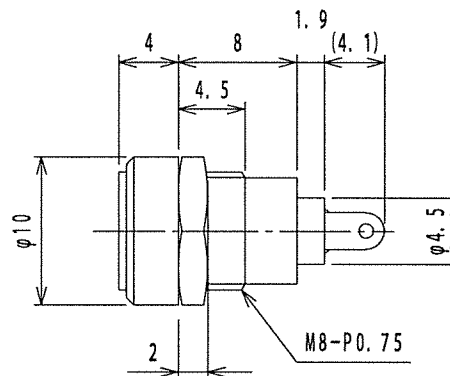



仕様 SPECIFICATION

1. 定格: MJ17=DC6.3V 2A (電圧区分2 JSAJ2)
Rating: MJ18=DC10.5V 2A (電圧区分3 JSAJ3)
MJ99=DC12V 0.5A
MJ99/3.8=DC12V 0.5A
2. 絶縁抵抗: DC500V/100MΩ以上
Insulation resistance:
DC500V/100MΩMIN.
3. 耐電圧: AC500V 1分間。
Withstand voltage:
AC500V 1minute.
4. 接触抵抗: 30mΩ以下
Contact resistance:
30mΩMAX

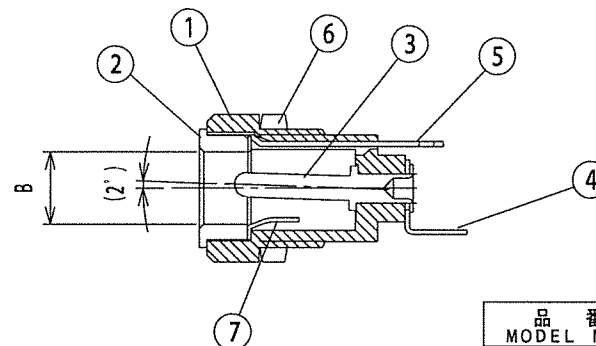

回路 CIRCUIT



品番 MODEL No.	A部	B部	適合プラグ MATE PLUG
MJ-17	φ1.65	φ4.2	φ4.0 X φ1.7
MJ-18	φ1.65	φ4.9	φ4.75 X φ1.7
MJ-99	φ1.3	φ3.6	φ3.4 X φ1.35
MJ-99/3.8	φ1.3	φ4.0	φ3.8 X φ1.35

					TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
7	CONTACT	PBS-EH t=0.25	1	Ni	±0.3	2/1		K. S	N. I	K. S	M. K
6	NUT 六角ナット	STEEL	1	Ni							
5	TERMINAL B ラグ B	BSR t=0.3	1	Ni	MODEL		QTY	PART NAME	DC JACK DCパ ワー ジ ャ ッ ク		
4	TERMINAL A ラグ A	BSR t=0.3	1	Ni	型式			品名	MJ-17, 18, 99, 99/3.8		
3	PIN ピン	BSBM	1	Ni	MATERIAL				DRAW. NO		
2	RING リング	BSBM	1	Ni	材質				図番		
1	BODY ボデー	PA	1		FINISH						
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE			EST MARUSHIN ELECTRIC MFG. CO., LTD.			