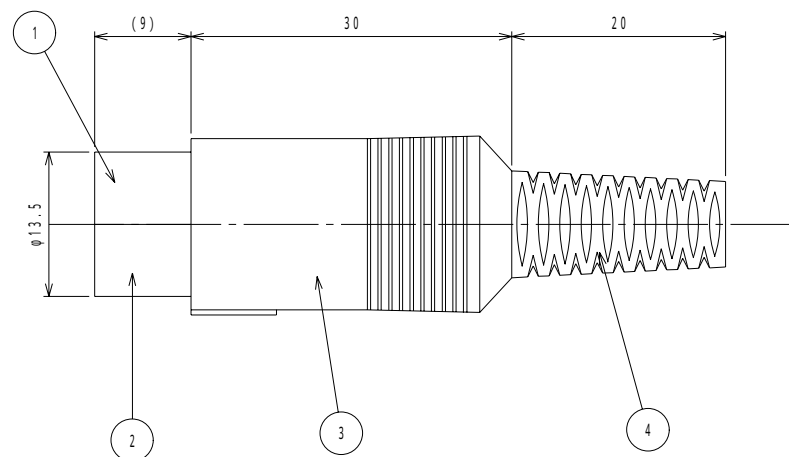



SPECIFICATION

DIELECTRIC STRENGTH:250V AC FOR ONE MINUTE.
INSULATION RESISTANCE:100MΩ MIN.AT 250V DC.
CURRENT CAPACITY:100V AC 1A

No. of Contact	3 P	5 P	5 P	6 P	7 P	8 P
CONTACT CONFIGURATION						
Model	MP130	MP132	MP133	MP016	MP017	MP018

6	CONTACT PIN	BRASS	3 - 8	Ni	
5	INSULATOR	PBT G=15%	1		
4	PROTECTOR	PVC	1		
3	CAP	PVA	1		
2	CONTACT A - 2	STEEL	1	Ni	
1	CONTACT A - 1	STEEL	1	Ni	
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE

TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
± 0.3	2 / 1	92 / 7 / 28		N, I		
MODEL 型式	QTY		PART NAME 品名	MP132 - 018		
MATERIAL 材質				DRAW.NO 図番		
FINISH 処理			EST [®] MARUSHIN ELECTRIC MFG.CO.,LTD			