
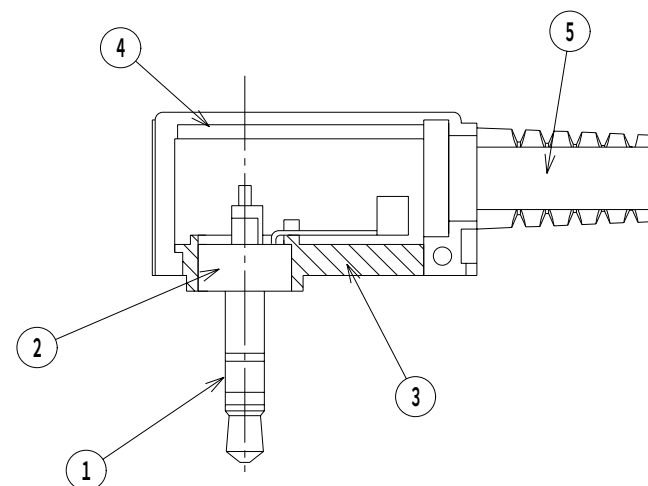


仕様 SPECIFICATION

耐電圧 : AC500V 1分間
DIELECTRIC STRENGTH:500V AC FOR ONE MINUTE.
接触抵抗 : 50mΩ以下
CONTACT RESISTANCE:50mΩ MAX
絶縁抵抗 : DC500Vにて100MΩ以上
INSULATION RESISTANCE:100MΩ MIN. AT 500V DC.

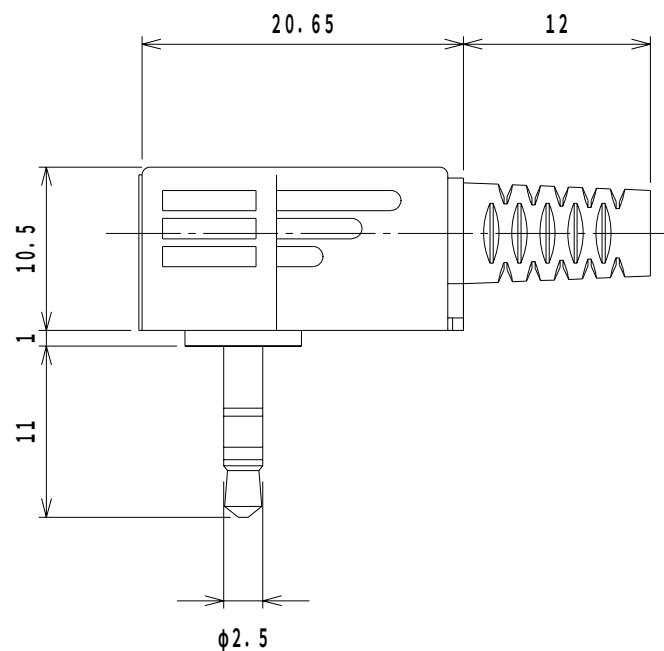

TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
±0.3	2/1	080901		N. I		
MODEL 型式		QTY	PART NAME 品名		No. MP-023LN	
MATERIAL 材質			DRAW. NO 図番		MP023LN	
FINISH 処理		EST MARUSHIN ELECTRIC MFG. CO., LTD.				

5	CABLE PROTECTOR	PVC	1		
4	CAP	PP	1		
3	BASE	PC	1		
2	RING	BRASS	1	Ni	
1	PLUG		1	Ni	
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE