
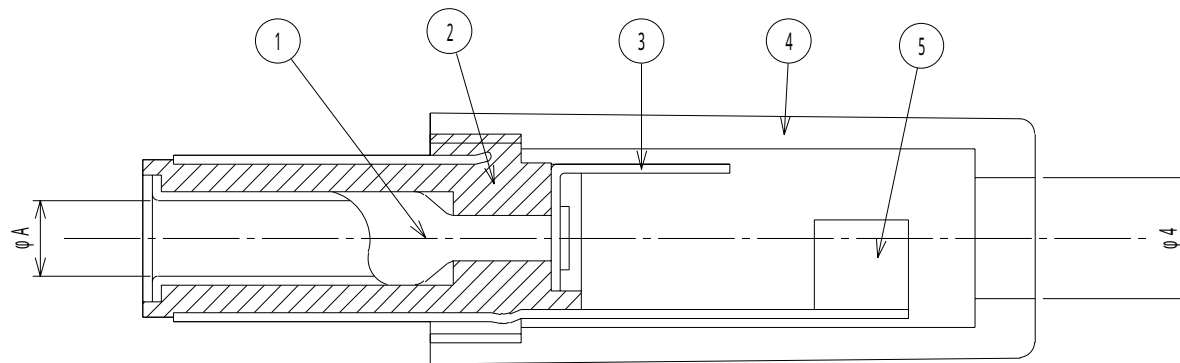
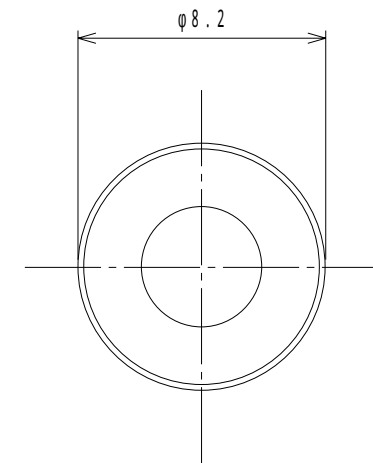


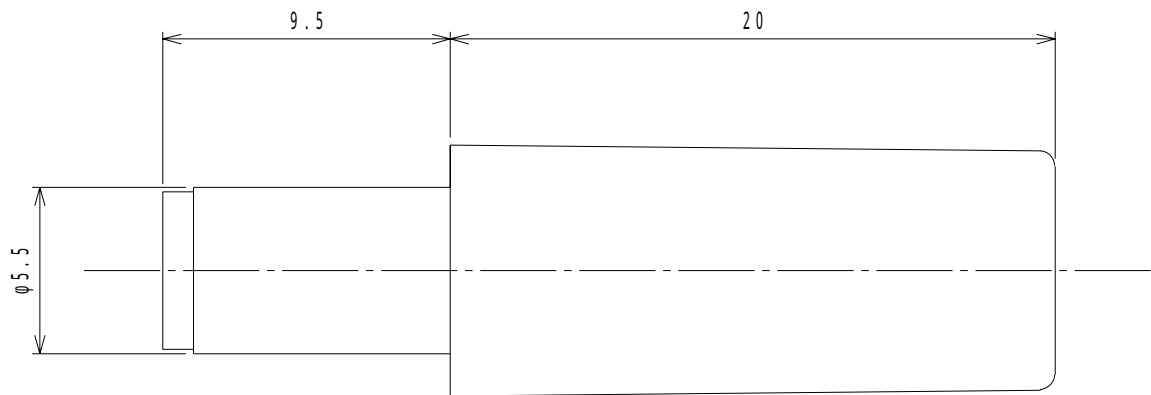

仕様 SPECIFICATION

1. 定 格: MP121M=DC12V 0.5A
RATING: MP122M=DC12V 1A
2. 耐電圧: AC500V 1分間
WITHSTAND VOLTAGE:
AC500V 1MINUTE.
3. 絶縁抵抗: DC500Vにて100MΩ以上
INSULATION RESISTANCE:
DC500V/100MΩ MIN.
4. 接触抵抗: 30mΩ以下
CONTACT RESISTANCE:
30mΩ MAX.

	A
MP121M	2.1φ
MP122M	2.5φ

TOLERANCE	SCALE	DATE		DESIG	DRAW	INSPE	APRO
± 0 . 3	4 / 1				S . I	N . I	
MODEL 型式			QTY	PART NAME 品名	MP 1 2 1 M / MP 1 2 2 M		
MATERIAL 材質					DRAW.NO 図番	MP 1 2 1 M	
FINISH 処理			 MARUSHIN ELECTRIC MFG.CO.,LTD				

LET	PART NAME	MATERIAL	QTY	FINISH	NOTE
5	CONTACT B スリ-ブ 端子	BSR	1	NI-P	
4	CAP キャップ	A.B.S RESIN	1		
3	TERMINAL センタ-端子	BSR	1	NI-P	
2	INSULATOR 絶縁体	A.B.S. RESIN	1		
1	CONTACT A 中心電極	BSR	1	NI-P	