
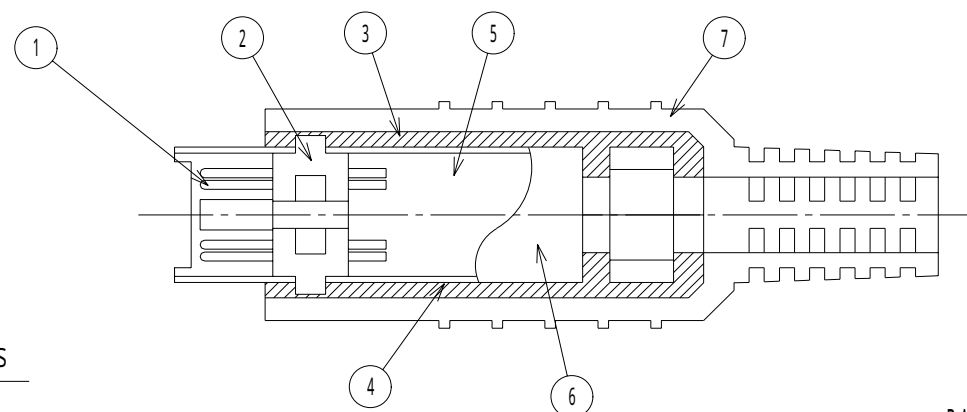
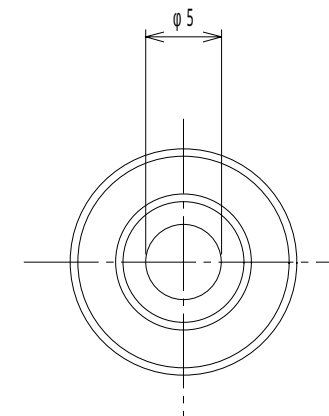
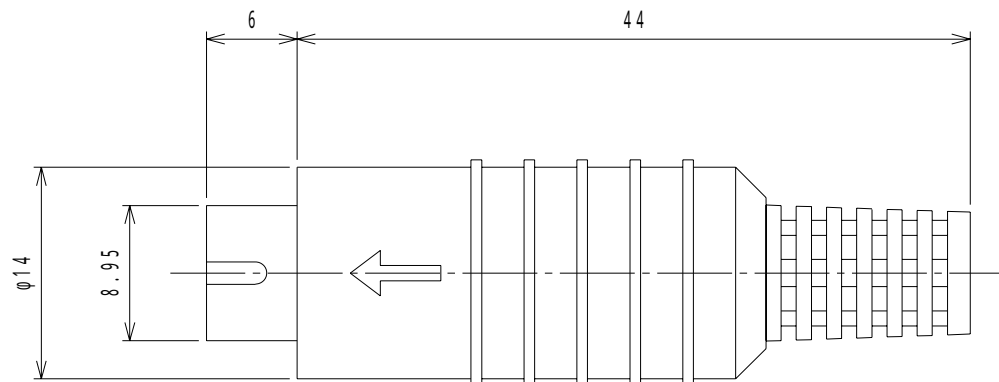


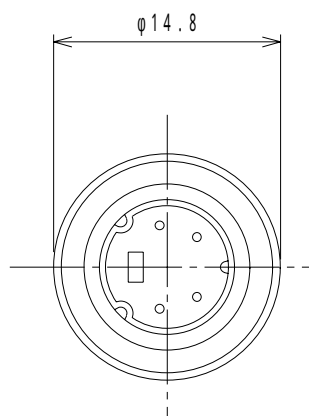

CONTACT CONFIGURATIONS

MP371/3	MP371/4	MP371/5	MP371/6	MP371/7	MP371/8

SPECIFICATION

RATING:100V AC 1A MAX.(12V DC 2A MAX.)
 INSULATION RESISTANCE:50M MIN AT 250V DC
 DIELECTRIC STRENGTH:250V AC/1 MINUTE.

						TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
7	CAP	PP	1			± 0 . 5	2 / 1			N . I		
6	METAL SHELL B	BRASS	1	Ni		MODEL 型式		QTY	PART NAME 品名	MINI CIRCURAR CONNECTOR MP371 / 3 - 8		
5	METAL SHELL A	BRASS	1	Ni								
4	CABLE HOLDER B	ABS	1									
3	CABLE HOLDER A	ABS	1									
2	HOUSING	PC	1			MATERIAL 材質				DRAW.NO 図番	MP371	
1	PIN	BRASS	4 ~ 8	Ag		FINISH 処理		 MARUSHIN ELECTRIC MFG.CO.,LTD.				
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE							