
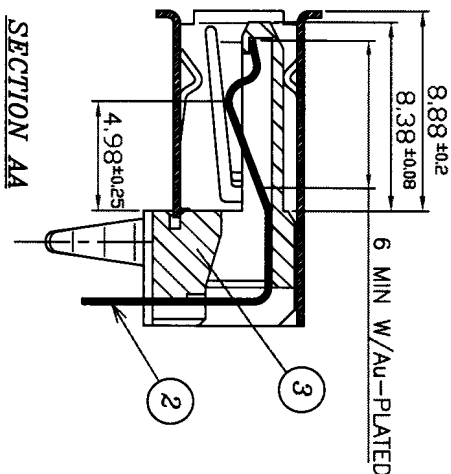
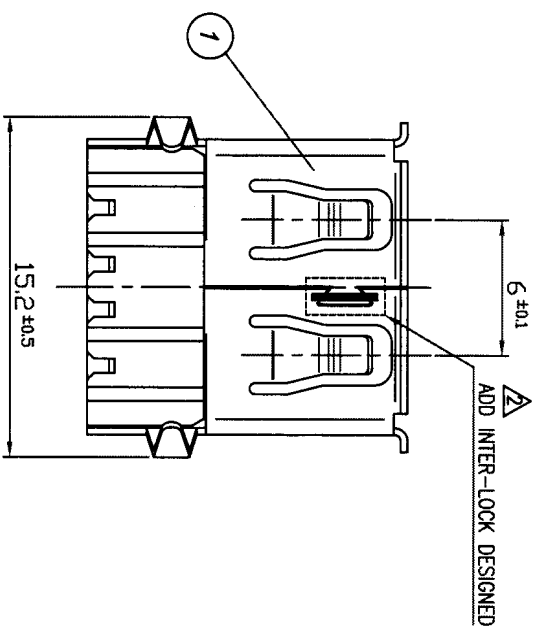
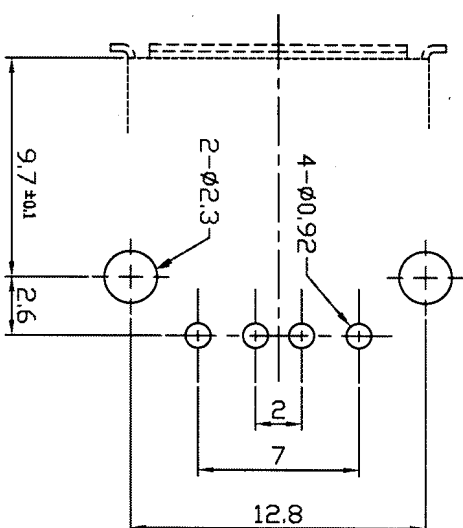
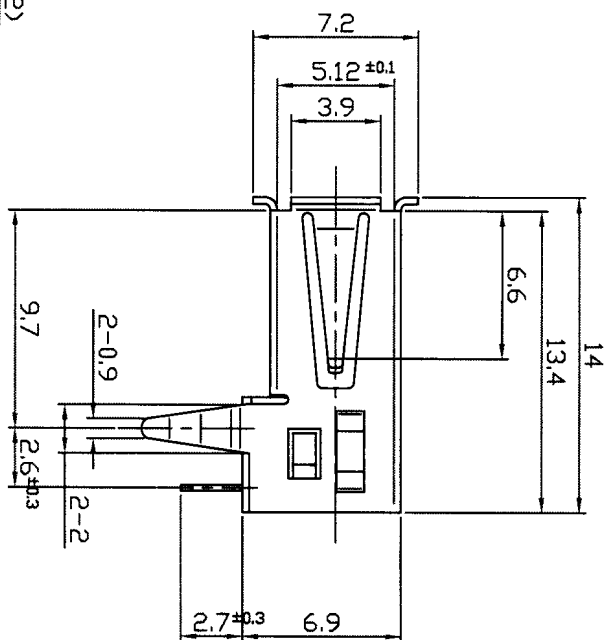


REVISION

LTR	DESCRIPTION	DATE	APPROVED
	VER.1: REPLACED OLD VERSION RELEASED ON 22-05-2001	23-09-2008	K.F.I.M
△	ADDED PLATING DETAILS	08-02-2010	K.F.I.M
△	ADDED INTER-LOCK DESIGNED	13-07-2010	K.F.I.M

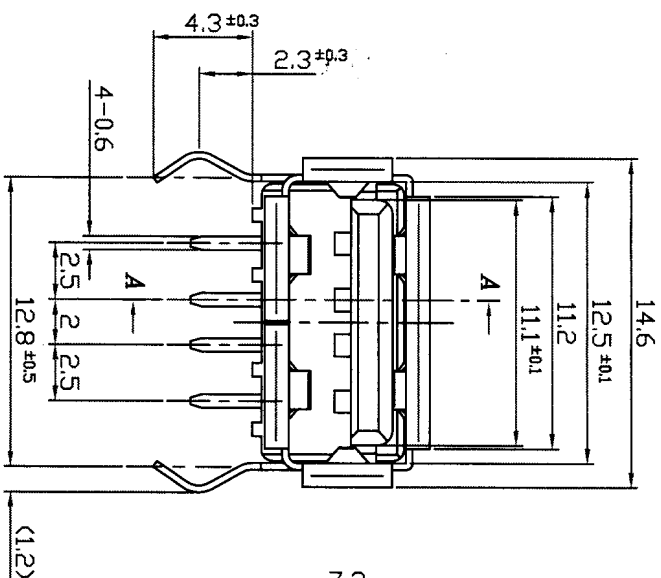

NOTES

1. SHELL PLATING:
UNDERPLATE : MINIMUM 1.00 MICROMETERS NICKEL
OUTSIDE : MINIMUM 2.5 MICROMETERS BRIGHT TIN
2. CONTACT PLATING:
UNDERPLATE : MINIMUM 1.25 MICROMETERS NICKEL
SOLDER TAILS : MINIMUM 3.8 MICROMETERS BRIGHT TIN
MATING AREA : MINIMUM 0.08 MICROMETERS GOLD

TOLERANCES

X <= 5 = ±0.10
X > 5 = ±0.30
ANGULAR = ±---

DO NOT SCALE DWG.

FINISHED

LET	PART NAME	QTY	MATERIAL	REMARK
3	HOUSING	1	PBT/GF RESIN	WHITE
2	CONTACT	4	PBS	0.25t N/Au-PLATED
1	SHELL	1	PBS	0.3t N-PLATED

PART NAME	DWG NO. VER.1
4-WAY TYPE A USB RECEPTACLE	MUSB-401
MATL	SCALE
AS SHOWN IN TABLE	3/1 mm
DATE	DRN / APPD.
23-09-2008	Y.H.TSANG/K.F.I.M

MARUSHIN ELECTRIC MFG. CO., LTD