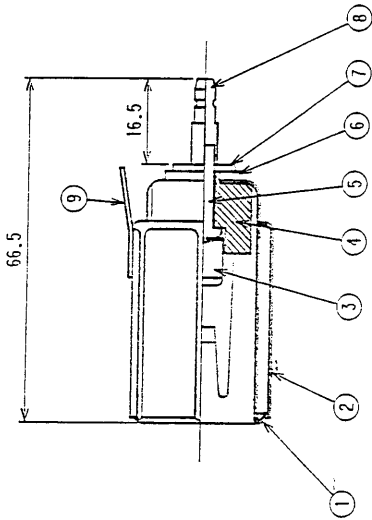



NOTE:  
 RATING - 12 VDC 15 A  
 DIELECTRIC STRENGTH - 500 VAC FOR  
 ONE MINUTE  
 INSULATION RESISTANCE - 100 MEGAOHM  
 min. FOR 1 MINU  
 -TE

| QTY | PART NAME       | MATERIAL | QTY | FINISH     | NOTE  | FINISH | REMARKS | DATE | DESIGN | DRAW | INSPE | AIRG |
|-----|-----------------|----------|-----|------------|-------|--------|---------|------|--------|------|-------|------|
| 1   | FASTON TERMINAL | BRASS    | 1   | CHROMATE-P | 1=0.8 |        |         |      |        |      |       |      |
| 1   | CENTER TERMINAL | BRASS    | 1   | Ni-P       |       |        |         |      |        |      |       |      |
| 1   | WASHER          | STEEL    | 1   | UNI-CHRO-P |       |        |         |      |        |      |       |      |
| 1   | INSULATOR B     | PHENOL   | 1   | Ni-P       |       |        |         |      |        |      |       |      |
| 1   | CENTER BAR      | BRASS    | 1   | Ni-P       |       |        |         |      |        |      |       |      |
| 1   | INSULATOR A     | CERAMIC  | 1   | Ni-P       |       |        |         |      |        |      |       |      |
| 1   | CONTACT SPRING  | STEEL    | 1   | CHROMATE-P |       |        |         |      |        |      |       |      |
| 1   | HOUSING B       | STEEL    | 1   | CHROME -P  |       |        |         |      |        |      |       |      |
| 1   | HOUSING A       | STEEL    | 1   | CHROME -P  |       |        |         |      |        |      |       |      |
| 1   | LET             |          |     |            |       |        |         |      |        |      |       |      |

MYBC-012S  
 MYBC-012S  
 MYBC-012S  
 MYBC-012S

MYBC-012S  
 MYBC-012S  
 MYBC-012S  
 MYBC-012S

MYBC-012S  
 MYBC-012S  
 MYBC-012S  
 MYBC-012S

MYBC-012S  
 MYBC-012S  
 MYBC-012S  
 MYBC-012S

MYBC-012S  
 MYBC-012S  
 MYBC-012S  
 MYBC-012S

MYBC-012S  
 MYBC-012S  
 MYBC-012S  
 MYBC-012S

MYBC-012S  
 MYBC-012S  
 MYBC-012S  
 MYBC-012S